

EuroDesign

Wood Engineering

TEAK COMPOSITE DECKING

60% real recycled teak and 30% recycled plastic.

Benefits :









- Teak “look-a-like”
- Durable
- Low maintenance
- Environmental friendly recycled product
- Any construction, caulk not needed
- Any color is possible
- Anti slip
- Low temperature because of the high teak content



The new teak composite is an alternative for people who love real teak but don't want to do the maintenance needed or want a cheaper option.

The composite looks and feels like real teak.

One of the advantages is that you can choose any construction with or without caulk.

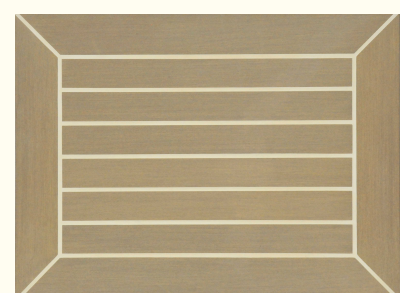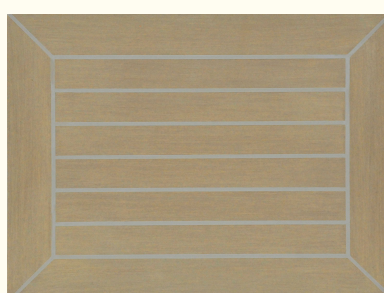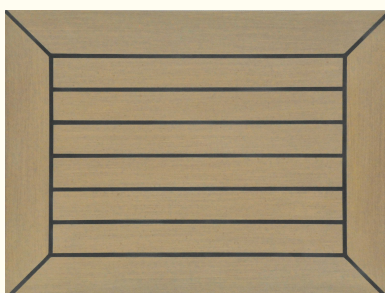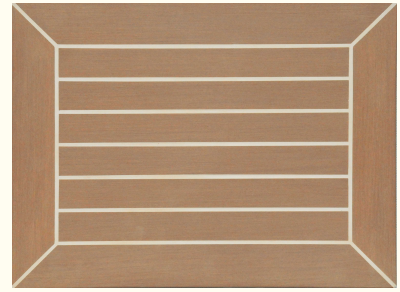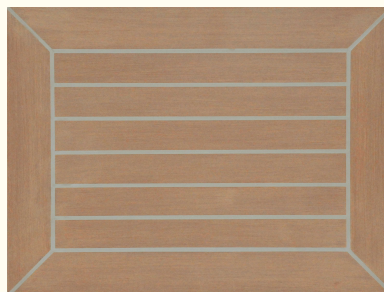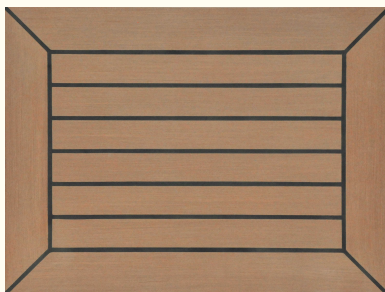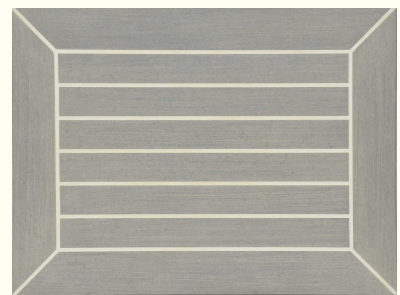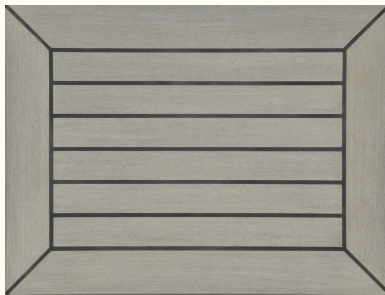

EuroDesign

Wood Engineering

SPECIFICATIONS

EuroDesign Pre-Manufactured Teak Composite Decking

Boat Decking Panels

Pre-manufactured teak decking made of teak slats/frames, caulk and a NRE-Backing. Ready to glue down on the boat. Same installation like real teak.

WPC Material

60% real recycled teak.

30% recycled plastic. From bottle caps. HDPE (High Density Polyethylene)

10% binding materials and pigment.

Less than 10% discoloring, contains an anti UV additive and anti oxidant to preserve the HDPE.

A 100% re-usable product.

Caulk

As standard EuroDesign use Bostic (Simson MSR deckcaulk).

Other brand like SIKA Flex and TDS are available.

NRE Backing

NRE : Fiber Reinforced Epoxy, used as a stiffener and a moist barrier.

Weights

Type	Size	Kg Per m ²	Lbs Per sqft
Caulked	4 mm	7.8 kg	1.6 lbs
Non-Caulked	4 mm	7.7 kg	1.58 lbs
Density		1.4 ton/m ³	0.087 lbs/ft ³

Standard Sizes of Slats/Frames

Width : any size and width.

Thickness : 4 + 1mm (NRE backing is 1mm).

<u>Advantages</u>	<u>Maintenance</u>
• Environment friendly recycled product. • Teak "look-a-like". • Durable. • Non-slip properties. • Low maintenance. • Any construction, caulk not needed.	• Only use products approved by EuroDesign. • Do not use high pressure cleaners. • Do not use chemicals. • Only normal cleaner required.

